

High Efficiency Radial Ventilators

Series BAA



İNCİRCİOĞLU
VANTİLATÖR, KLİMA İMALAT SAN. VE TİC. LTD. ŞTİ.

Spiral housing positions and dimensions

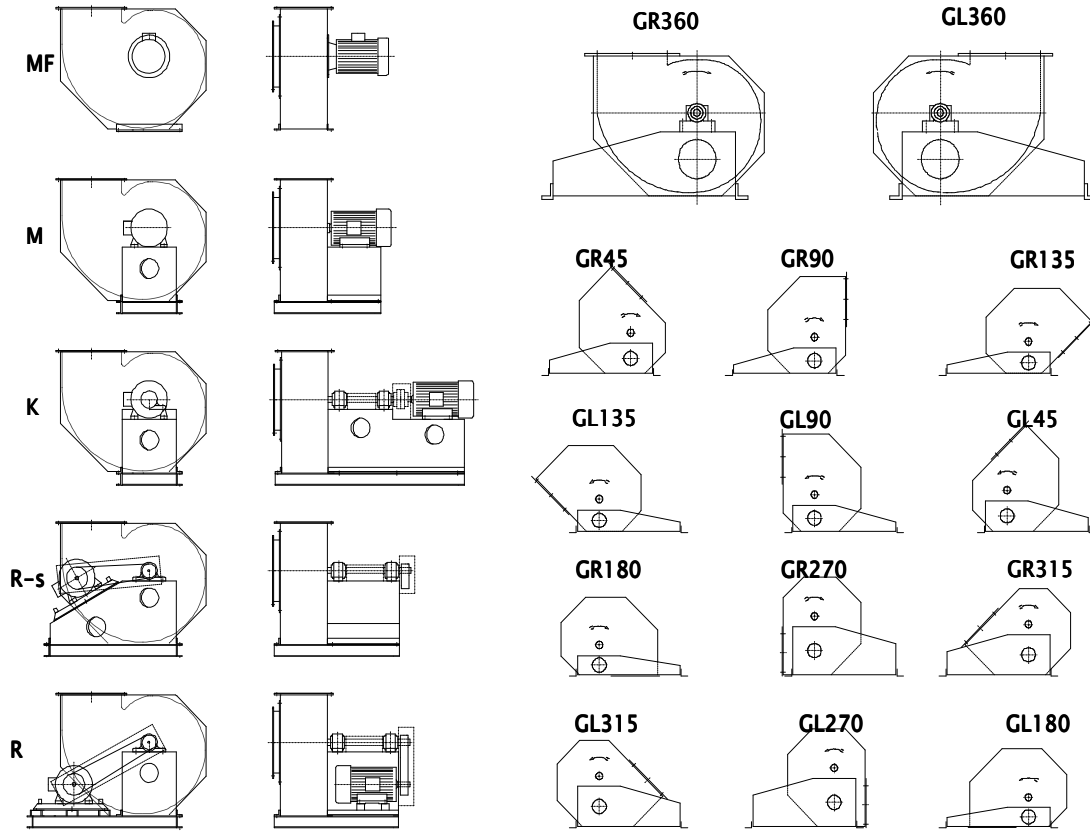

Standard designation:

BAA a ex / R U 200 M GR360

1 2 3 4 5 6 7 8

- 1 = Type designation
- 2 = Abnormal impeller
- 3 = Ex-protection
- 4 = Construction
- 5 = Connection type
- 6 = Type
- 7 = Drive

a = Standard impeller, z.B. = Intermediate blades

R = Radial with single inlet, Z = Radial with double inlet

U = Direct tube connection (flange optional),

E = Inlet nozzle, S = Suction Box

MF Direct drive with B5 flange motor

M Direct drive with B3 motor on welded support

K Direct drive by means of an elastic coupling

KG Direct drive by means of a coupling or gearing


R Belt drive, motor on base frame

R-s Belt drive, motor on beveled frame

- 8 = Housing Position

GR = Right handed GL = Left handed


BAA Type High Efficiency Radial Ventilators Dimension Table

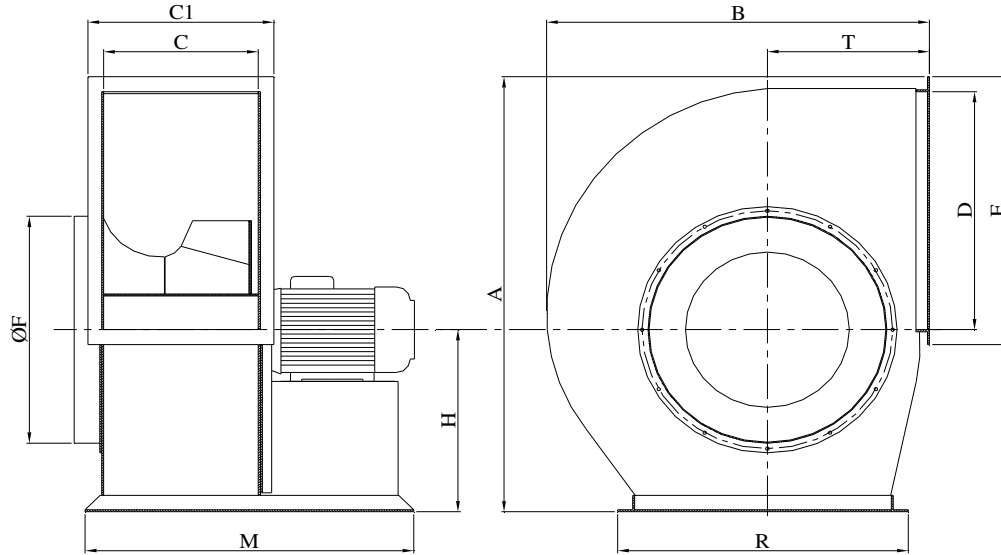


Type	Motor Power and RPM		A	B	C	C1	D	E	ØF	H	M	R	T
	kW	rpm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
125	0.25	1450	625	550	230	295	330	390	305	265	475	405	250
	1.1	2850	625	550	230	295	330	390	305	265	485	405	250
135	0.25	1450	685	578	230	295	370	430	350	285	475	445	257
	2.2	2850	685	578	230	295	370	430	350	285	535	445	257
150	0.37	1450	776	663	290	355	415	475	390	331	535	497	292
	4	2850	776	663	290	355	415	475	390	331	655	497	292
165	0.75	1450	830	703	325	390	450	510	425	350	580	531	302
	5.5	2850	830	703	325	390	450	510	425	350	710	531	302
185	1.1	1450	910	782	354	420	495	555	465	385	654	592	342
	7.5	2850	910	782	354	420	495	555	465	385	770	592	342
200	2.2	1450	985	833	395	460	545	605	510	410	740	631	357
210	3	1450	1055	893	415	500	575	655	540	438	760	661	386
225	4	1450	1100	932	433	518	605	685	565	455	798	690	401
245	5.5	1450	1214	1033	478	563	665	745	625	507	863	750	462
260	7.5	1450	1270	1080	505	590	700	780	635	530	960	800	462
270	11	1450	1337	1125	532	618	735	815	685	562	1088	848	477
300	15	1450	1457	1235	586	672	815	895	735	602	1192	920	522

*Direct drive type dimension table. Please contact us for other types.


BAA 125

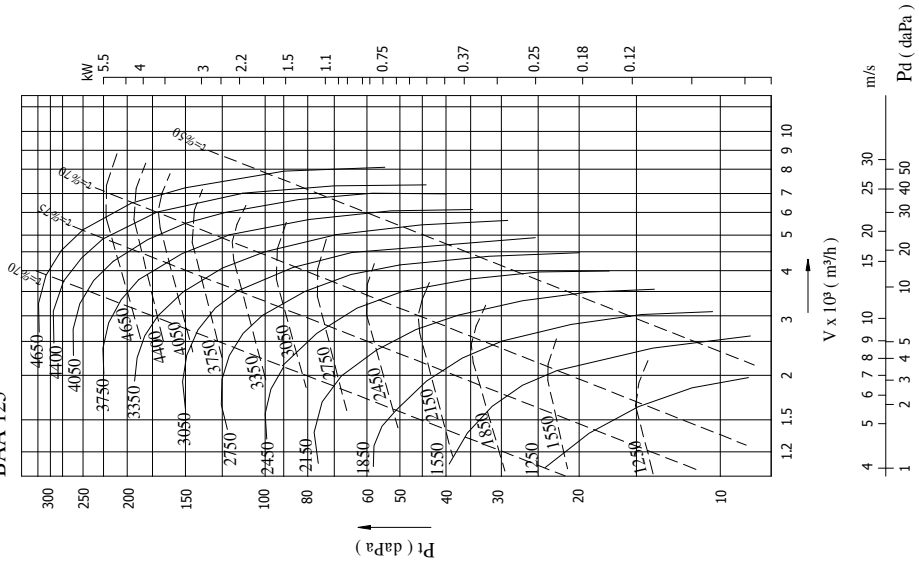


BAA 150

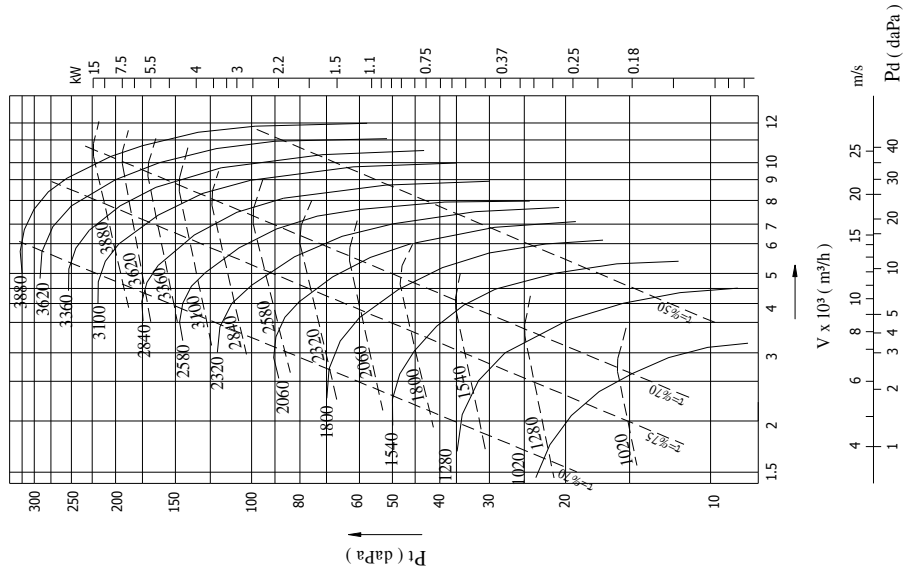


BAA 165

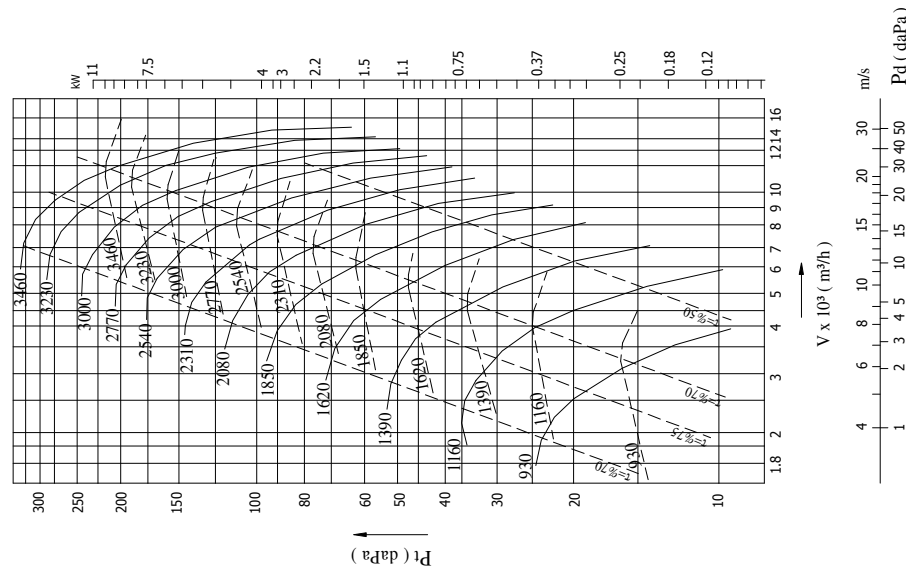


BAA 185

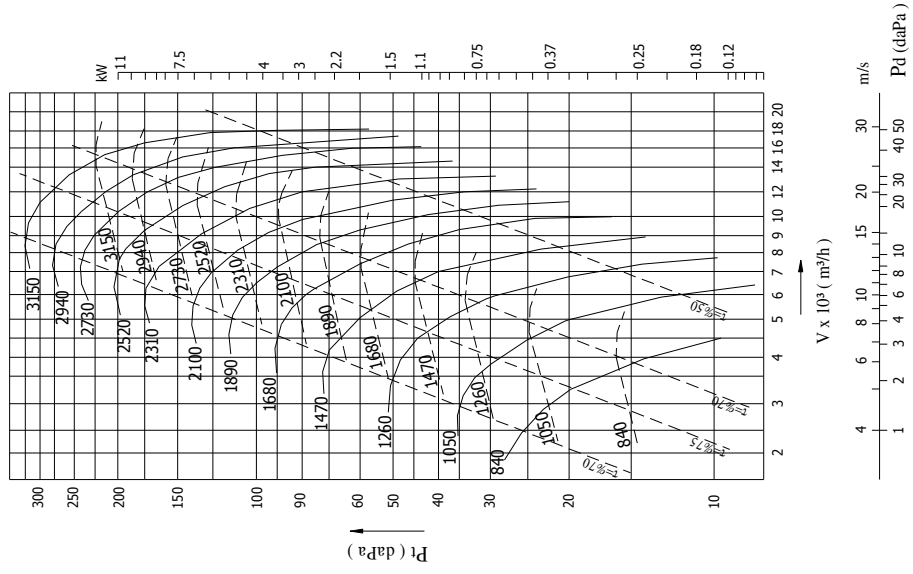


BAA 200

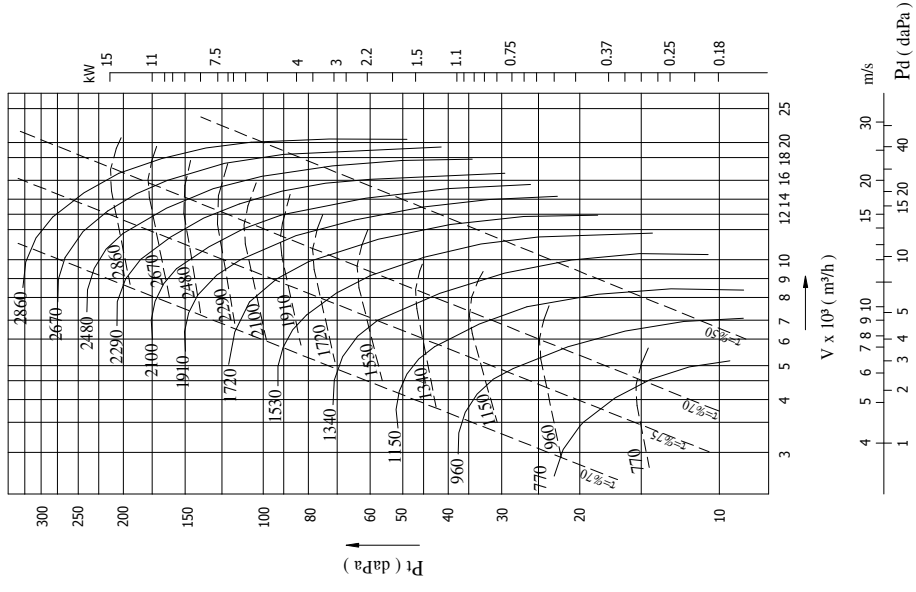


BAA 210

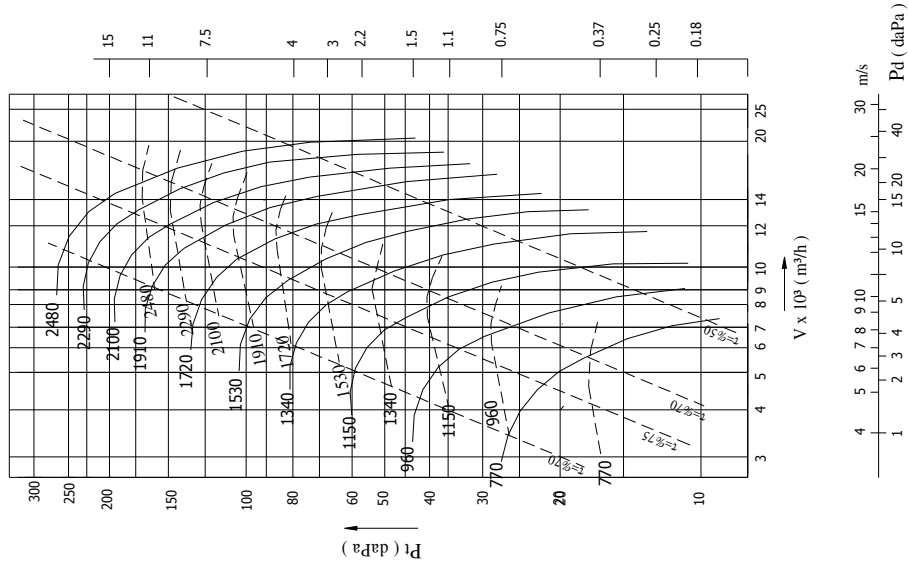


BAA 225

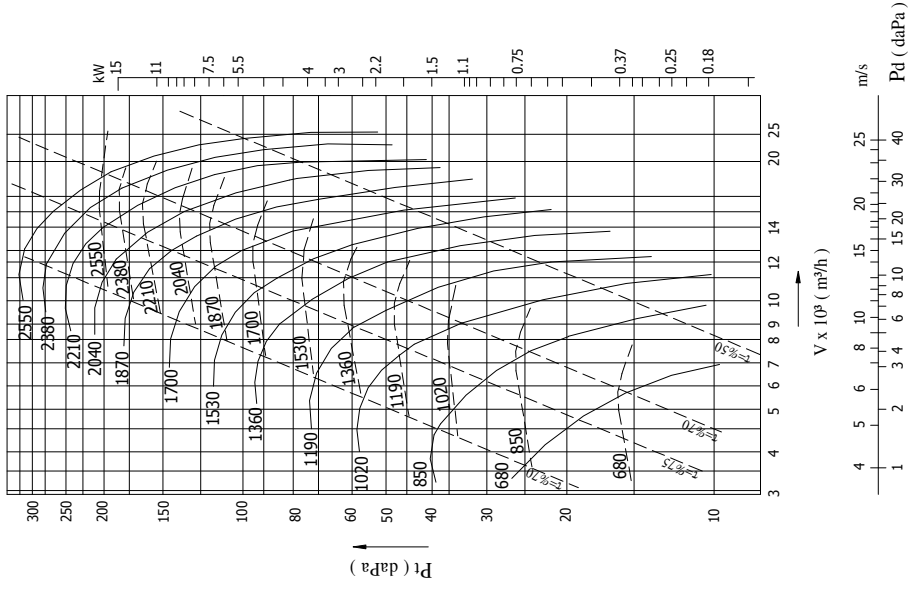


BAA 245

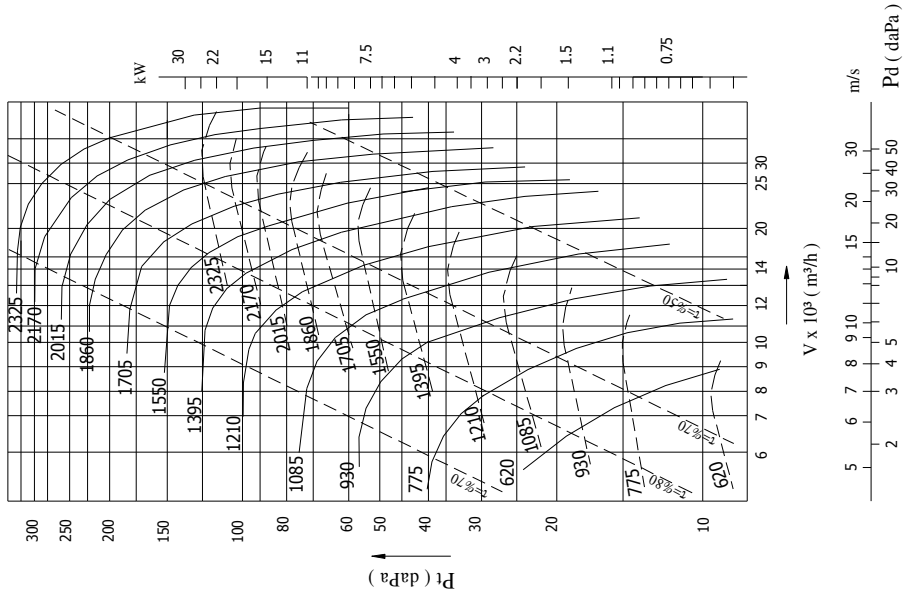


BAA 260

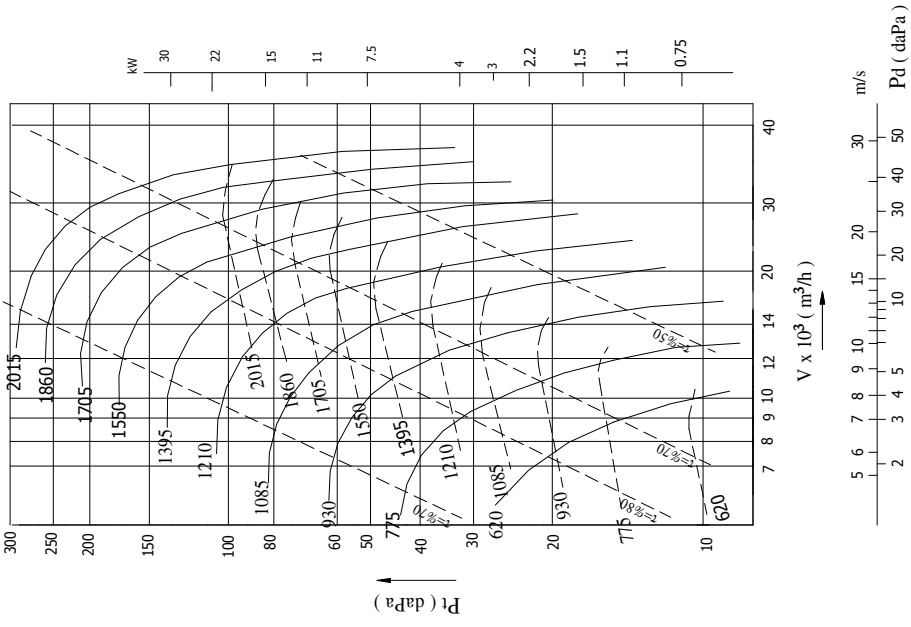


BAA 270

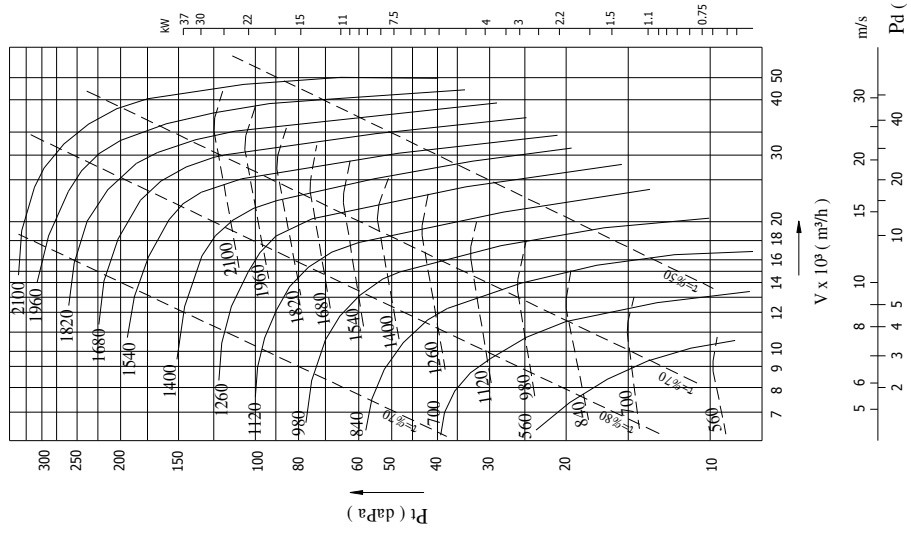


BAA 300


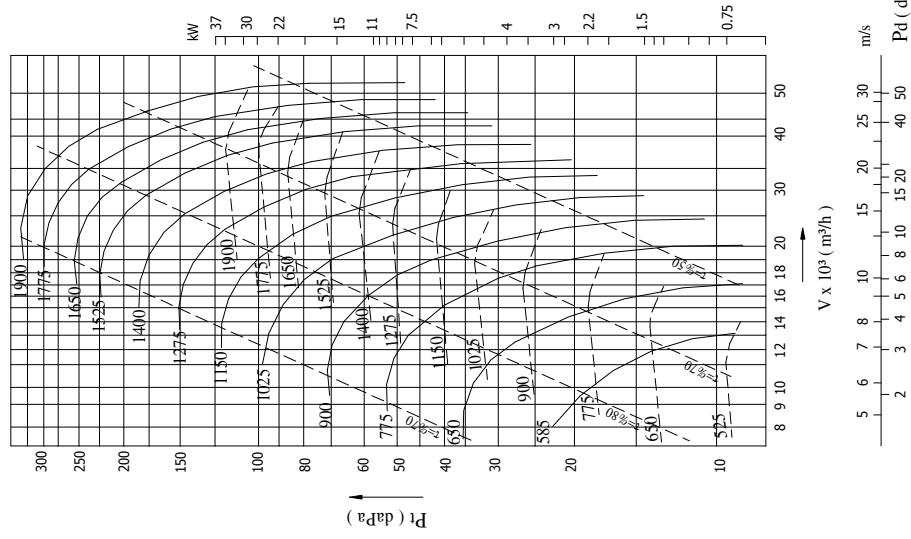




BAA 330

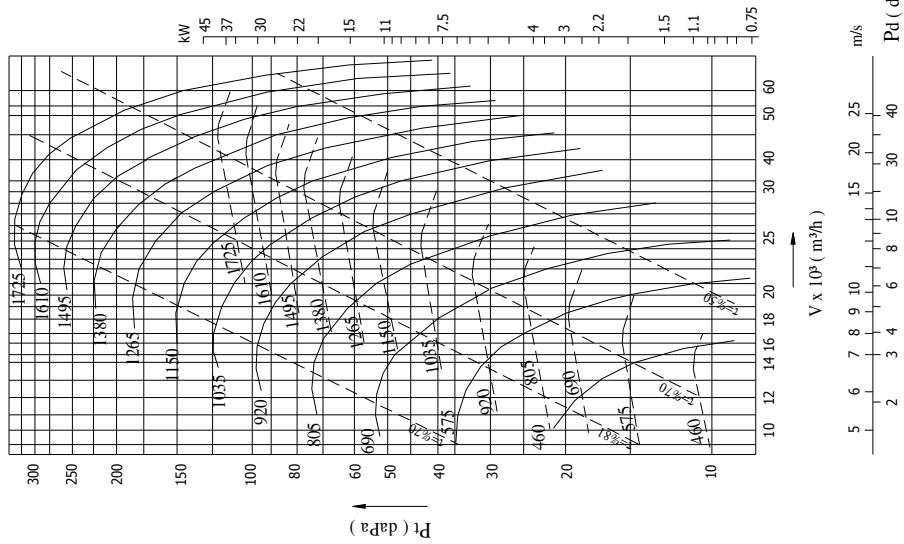

BAA 365

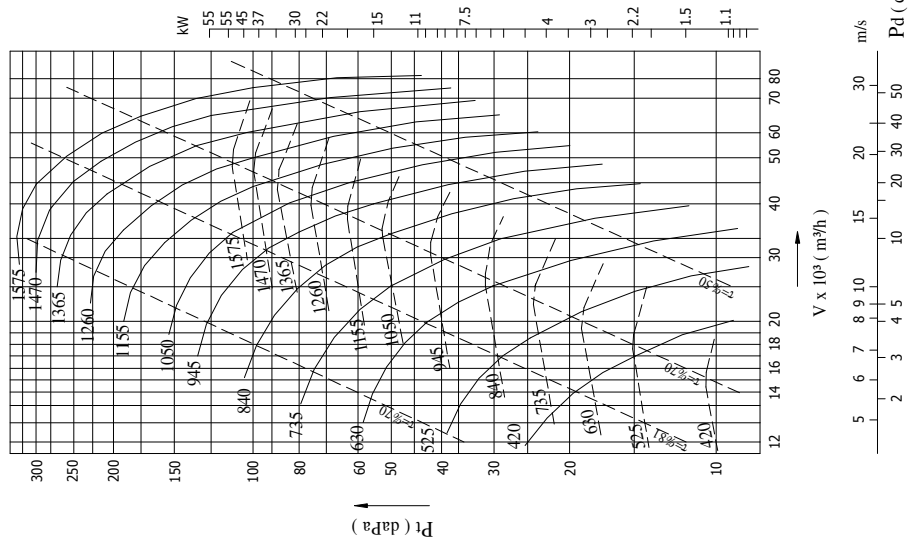

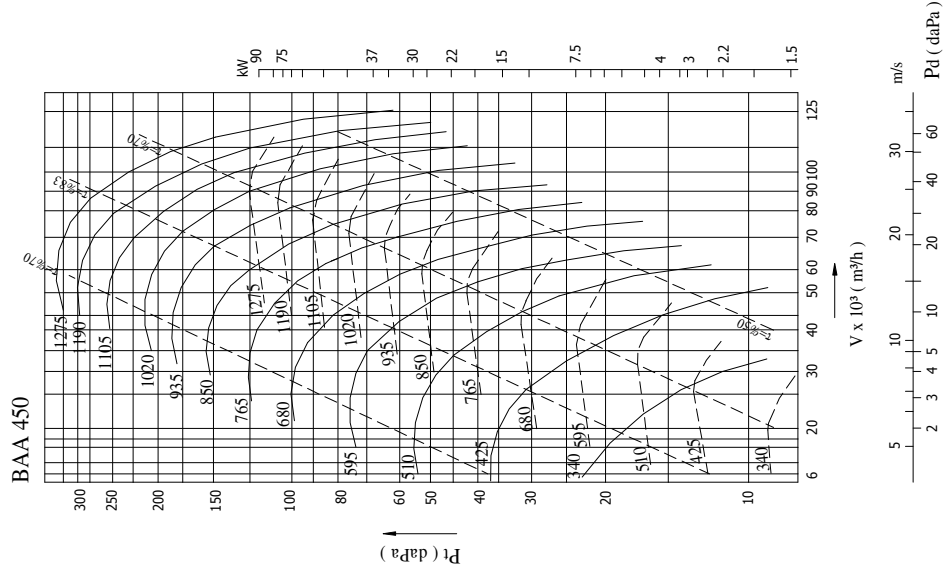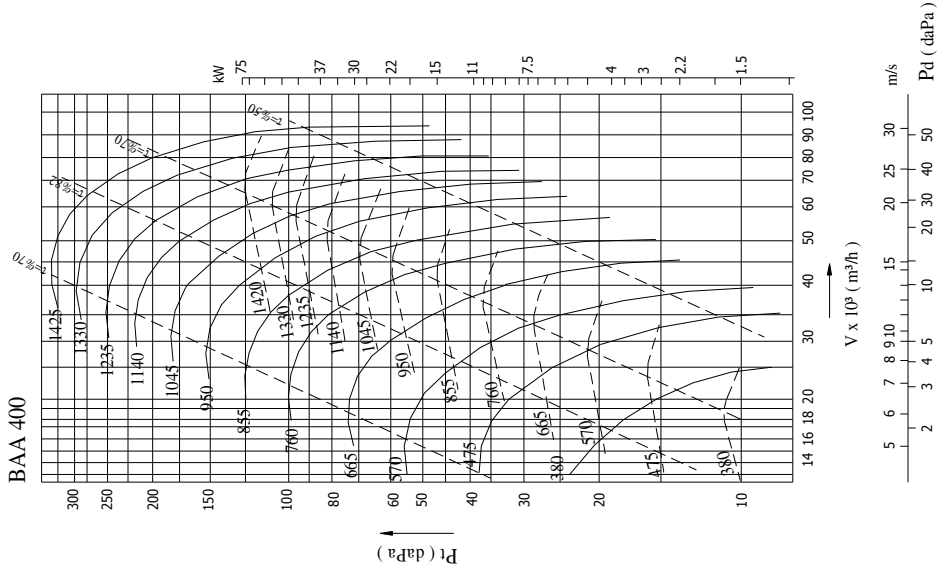

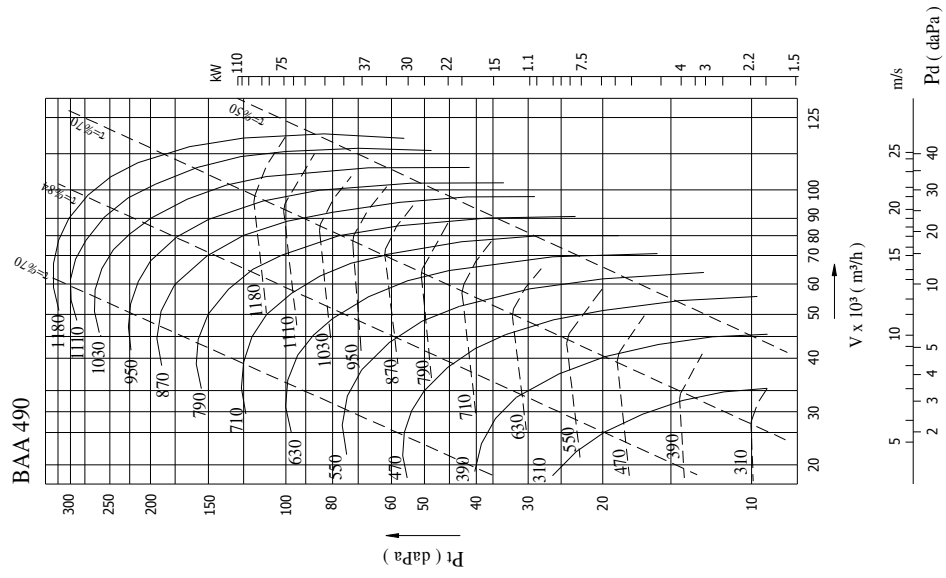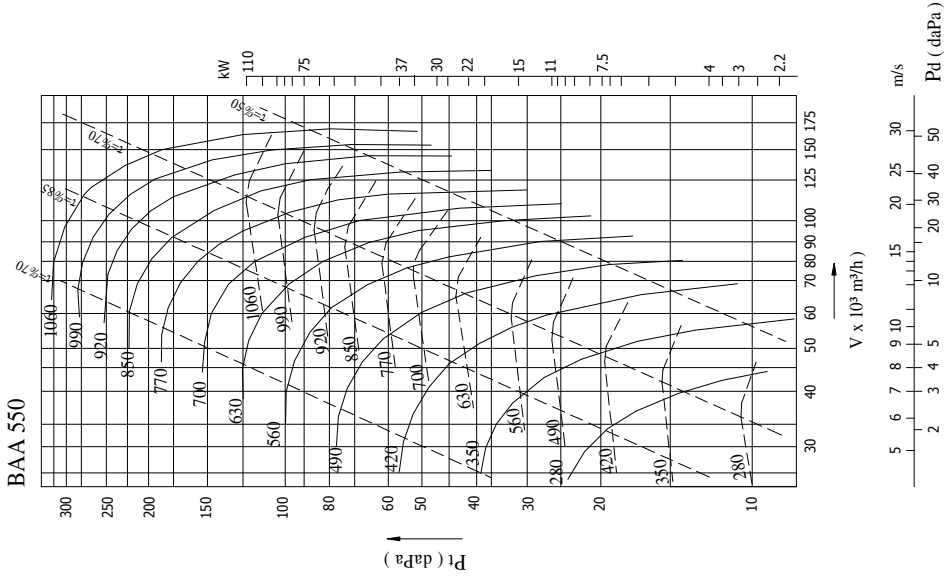



İNCİRCİOĞLU
VANTİLATÖR, KLİMA İMALAT SAN. VE TİC. LTD. ŞTİ.

Head Office :

Çobançeşme Mahallesi, Sanayi Caddesi
Genç Osman Sokak, No.16
Yenibosna / İstanbul / Türkiye
☎ : (0212) 551 1112
Fax : (0212) 654 2776

Factory :

Aşağı Sevindikli Köy Yolu Üzeri
Muratlı / Tekirdağ / Türkiye
☎ : (0282) 373 7088
Fax : (0282) 373 7087

www.incircioglu.com
info@incircioglu.com



ISO 9001:2008



Kalite Yönetim Sistemi
TS EN ISO/IEC 17021
AB-0005-YS

